




Attach the back brace use (4) $\frac{3}{4}$ " X $\frac{3}{8}$ " bolt and (4) $\frac{3}{8}$ " spring washer (place the spring washer on the inside)


February, 2014

Leg assembly kit:

Qty	Description
2	Legs
2	Brace (back & bottom brace)
4	1 $\frac{1}{2}$ " X $\frac{3}{8}$ " bolt
8	$\frac{3}{4}$ " X $\frac{3}{8}$ " bolt
12	$\frac{3}{8}$ " X spring washer
12	$\frac{3}{8}$ " flat washer
4	1 $\frac{1}{4}$ " X $\frac{5}{16}$ " self tapping screw
6	#8 X $\frac{3}{4}$ " wood screw
4	Rubber shoe
1	drawer kit

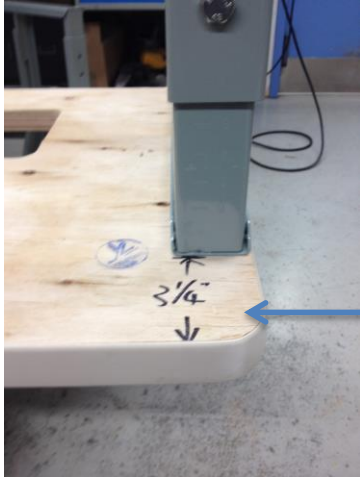

Left side - set the table top bottom side up on a work bench or any convenient work station - from the edge of the table to the leg measure $3 \frac{1}{4}$ " as shown - use the $1 \frac{1}{4}$ " X $\frac{5}{16}$ " self tapping screw to anchor the leg.

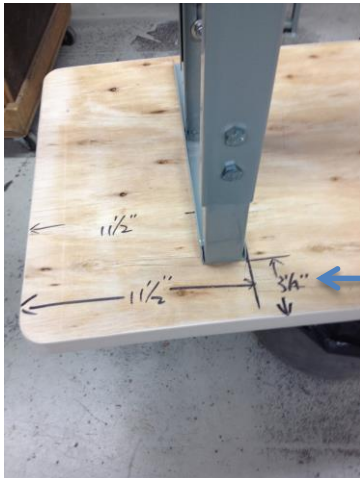

Right side - from the edge of the table to inner side of the leg measure $11 \frac{1}{2}$ " and $3 \frac{1}{4}$ " from back edge of the table as shown here - use the $1 \frac{1}{4}$ " X $\frac{5}{16}$ " self tapping screw to anchor the leg.



Attach the bottom brace use (4) $1 \frac{1}{2}$ " X $\frac{3}{8}$ " bolt and (4) $\frac{3}{8}$ " washer. Place the washers from the top.

Rubber shoe

Note: Instructions are based on facing the table from the front as it is being assembled.

This is it looks when you are done

